

Thank you for purchasing an Amerillum Corporation reflector kit. Please read these instructions completely before installing.

WARNING: Risk of fire or electric shock. Install this kit only in fixture and dimensions shown in drawing FIGURE: A.

- STEP 1 TURN OFF POWER TO FIXTURE. Remove fixture diffuser (if any) and remove all lamps.
- STEP 2 Remove ballast cover enclosure and lamp sockets mounting brackets. SEE FIGURE: A.
- STEP 3 Disconnect power and cap off leads, then remove ballast. SEE FIGURE: B.
- STEP 4 Install NEW ballast and NEW lamp sockets onto ballast leads. SEE FIGURES: C-D.

WARNING: To prevent wire damage or abrasion, DO NOT expose wire to edge of sheet metal or other sharp object. DO NOT MAKE OR ALTER ANY OPEN HOLES IN AN ENCLOSURE OF WIRE OR ELECTRIC COMPONENT DURING KIT INSTALLATION.

FIGURE: A


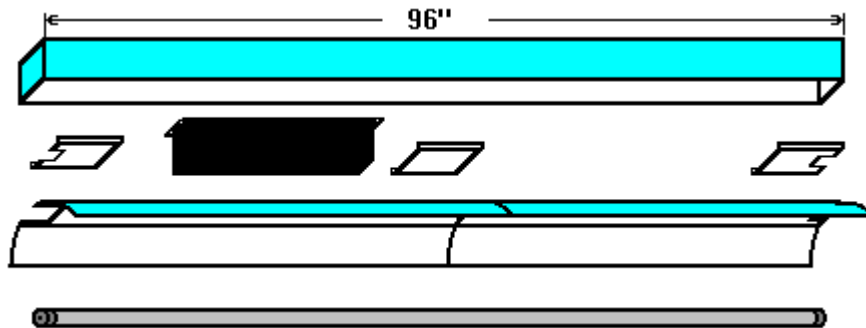


FIGURE: B

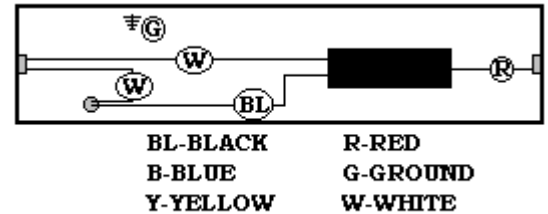

- STEP 5 Insert lamp sockets in NEW mounting brackets and Install one at each end of the fixture. SEE FIGURES: C-D. NOTE: USE TWO SELF-DRILLING SCREWS PER BRACKET (not provided).
- STEP 6 Install two brackets back to back at center of fixture. Ensure all tabs are pointing to the center of the fixture. (48" inches to center of fixture.) SEE FIGURES: C-D

WARNING: Risk of fire or electric shock. Fixture ballast wire, or other electrical parts, may be damaged when drilling for installation of reflector kit hardware. Check for enclosed wire and components.

- STEP 7 Connect power leads from ballast and install reflector to the special tabs that allow the reflector to clip on. (reflector per four foot section.) SEE FIGURE: C.
- STEP 8 Install NEW lamps.

WARNING: Risk of fire or electric shock. Reflector kit installation requires knowledge of fluorescent lighting electrical systems. If not qualified, DO NOT ATTEMPT installation. Contact a qualified electrician.

FIGURE: C

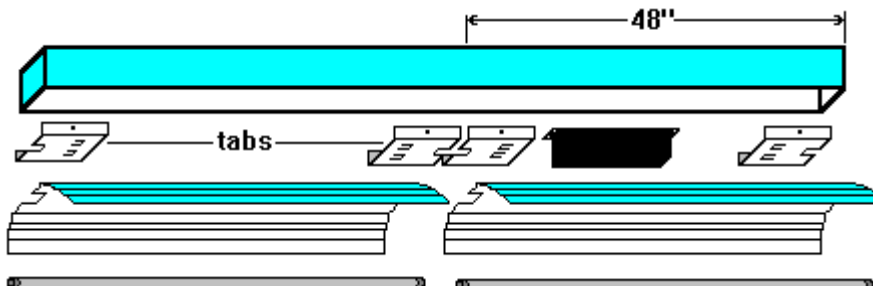


FIGURE: D

